

## Cable Sleeving

## Thermo-Trex® Fiberglass Ultra-Sleeve High Temperature Sleeving

Fiberglass Ultra-Sleeve High-Temperature Sleeving is a protective sleeve that is ideal for those areas where your cable runs through a particularly harsh environment of flash heat or flame, chemical or mechanical abuse. The Fiberglass Ultra-Sleeve offers great heat resistance up to 538°C. Available in inner diameters from ¼" to 2-1/2" to fit cable ranges from 1/8" to 3".



## Ratings



Continuous Temperatures: Up to 538°C (1000°F)

Intermittent Temperatures: Up to 650°C (1200°F)

## Performance Characteristics\*

- ✓ Flame Resistance: Excellent
- ✓ Weld Spatter Resistance: Very Good
- ✓ Molten Splash Resistance: Very Good
- ✓ Flexibility: Outstanding
- ✓ Abrasion Resistance: Moderate
- ✓ Water and Oil Resistance: Moderate

## Engineered to Resist



Flexing



High Temperature

## Features &amp; Benefits

### Finely Stranded Spun Glass Fibers

Finer strands mean more flexibility. Higher density of fibers per square inch increases protection of cable.

### Extra Thick Braid

Braided E-glass fiber yarn, heat treated and coated with acrylic saturant for superior high temperature resistance.

### High Temperature Properties

Suitable for continuous use at 538°C and intermittent use up to 650°C. Offers superior protection for cables, assemblies, hoses, and pipes.


### Available in Multiple Diameters

Can expand and contract by approximately 25% of its nominal size to allow for selection of the right size sleeve for the application.

## Ordering Information

For complete product ordering information, please scan the QR Code or contact your TPC sales representative

Part No.	Inner Diameter (in.)	Size Range (in.)
49200	0.25	1/8 to 3/8
49201	0.75	1/2 to 7/8
49202	1	7/8 to 1-1/4
49203	1.5	1-1/8 to 2
49204	2.5	2 to 3

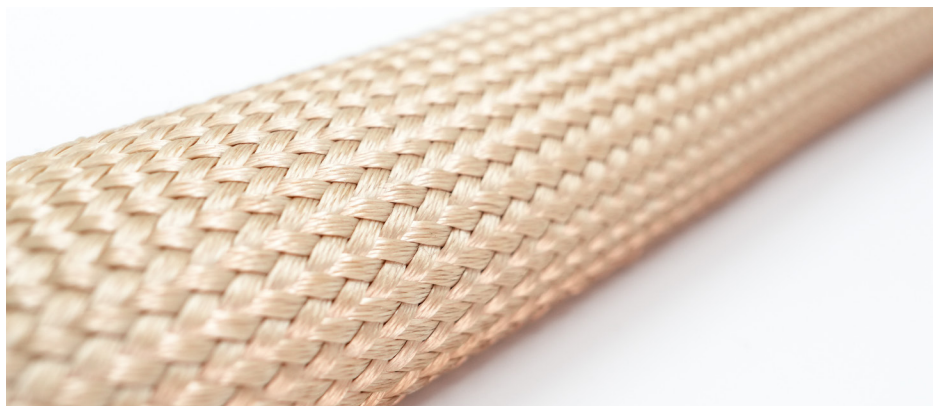

## Notes

\*Performance Characteristics in increasing resistance ability: Moderate, Good, Very Good, Excellent, Outstanding