


# 10, 12 & 14 AWG Molded 90 Degree Assemblies (3 & 4 Pole)

- IP69K Rated
- RoHS Compliant
- 600 V
- 20-25 Amp Rated
- Heavy-Duty

Quick-Connects™ make replacement of electrical and electronic control devices quick and simple. Plug sets are made with Super-Trex® SOOW Ultra-Gard® Portable Cord. A superior first-line of defense against tearing, abrasion, impact, oil, ozone and most chemicals; also flame and heat resistant and offers extreme all-weather flexibility too. The molded, keyed, 90°, vulcanized thermoset cordset provides rapid and secure connect and disconnect and ensures a water, oil and dust tight seal.

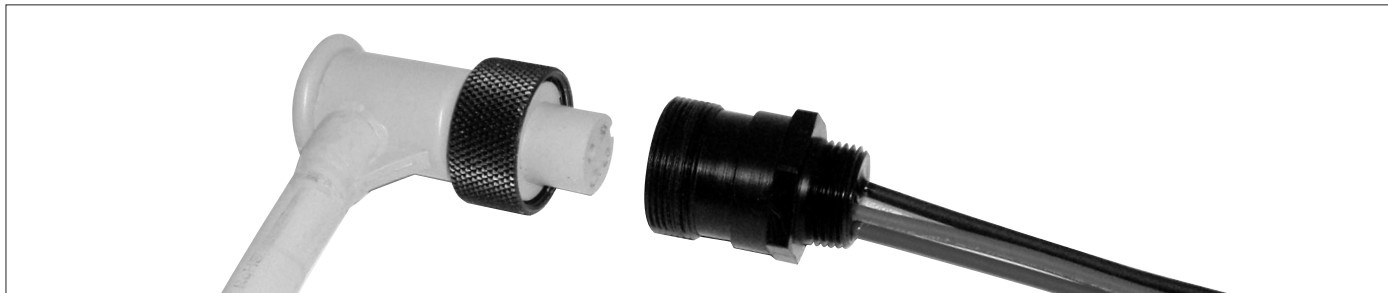

## FEATURES & BENEFITS

**1. 10, 12 & 14 AWG MOLDED 90° QUICK-CONNECT™ CORDSETS HOLD UP TO WASHDOWNS** — IP69K rated, provides a fast and durable method for connecting and disconnecting electrical motors and electrical equipment.

**2. CORDSETS MADE WITH SUPER-TREX® ULTRA-GARD® PORTABLE CORD, RATED 90°C** — Provides the best defense against tearing, abrasion, impact, oil, ozone and most chemicals. Flame and heat resistant. Extreme all-weather flexibility.

**3. HEAVY GAUGE BRASS SLEEVES AND CONTACT PINS** — Provides superior long life electrical contact. Ensures electrical continuity through repeated disconnects.

**4. RECEPTACLE HAS STRANDED, TINNED COPPER PIGTAILS INSULATED WITH 125°C CROSS-LINKED POLYETHYLENE** — Provides excellent oil and heat resistance.

**5. PLUG BODY IS DESIGNED WITH SUPER-TREX® TSE COMPOUND** — Provides superior resistance to oil, ozone and most chemicals. Flame and heat resistant. Extreme all-weather flexibility.

## ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

90° FEMALE CORD SETS				
AWG	PART NO.			DESCRIPTION
	3'	6'	12'	
10	CX14D64F003N	CX14D64F006N	CX14D64F012N	4 Pole
12	CY13D65F003N	CY13D65F006N	CY13D65F012N	3 Pole
12	CY14D66F003N	CY14D66F006N	CY14D66F012N	4 Pole
14	CZ13D67F003N	CZ13D67F006N	CZ13D67F012N	3 Pole
14	CZ14D68F003N	CZ14D68F006N	CZ14D68F012N	4 Pole

DELTRAN RECEPTACLES — STRAIGHT MALE				
AWG	PART NO.		DESCRIPTION	AMPS
	1/2" NPT THREAD	3/4" NPT THREAD		
10	84210N2	84210N4	Straight 4 Pole, Male Receptacle	25
12	84230N2	84230N4	Straight 3 Pole, Male Receptacle	25
12	84240N2	84240N4	Straight 4 Pole, Male Receptacle	20
14	83300N2	—	Straight 3 Pole, Male Receptacle	18
14	83400N2	—	Straight 4 Pole, Male Receptacle	15