


Field Installable M8 Nano Quick-Connex™

3 Amps • 30 Volts • Temp Range: -40°C to 85°C (-40°F to 185°F) • IP67 Rated • RoHS Compliant

Field Installable M8 Quick-Connex™ are impact and crush resistant. The IP67 rated shell and rubber bushing are sealed to provide protection against dust and water spray. Nickel plated brass coupling nut resists corrosion and provides a quick, secure assembly.

The gold plated copper alloy pins and sockets resist corrosion and provide a long life. Will fit most cables from 20 to 26 AWG.

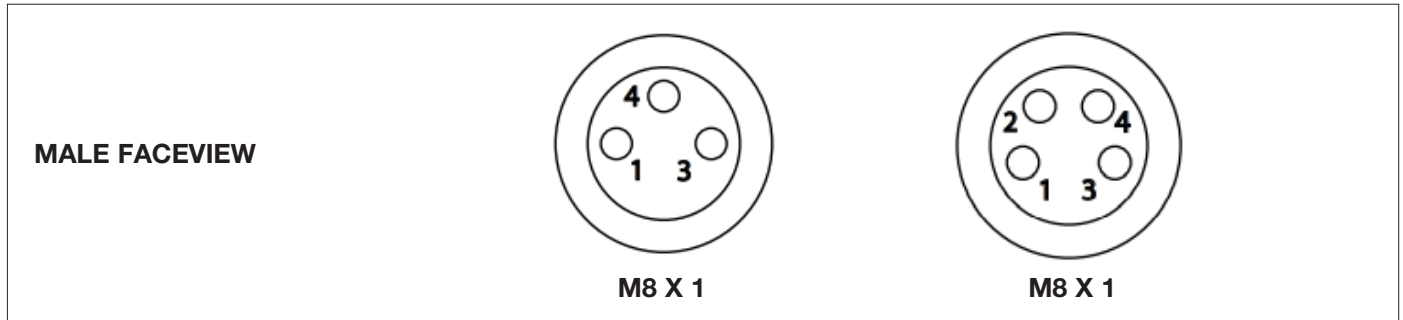

FEATURES & BENEFITS

1. SCREW LOCKING SYSTEM — Secure connection using only a simple screwdriver

2. POLYAMIDE BODY AND SLEEVE — Impact and crush resistant.

3. GOLD PLATED COPPER ALLOY PINS AND SOCKETS — Provide long life, easy positive engagement and resist corrosion.

4. NICKEL PLATED BRASS COUPLING NUT — Resists corrosion and gives quick, secure assembly.

5. NITRILE RUBBER O-RING AND GROMMET — Provides internal protection from environmental contaminants like dust, dirt and fluid spray

6. IP67 INGRESS PROTECTION— Provides protection against dust and water spray

7. PRESSING SCREW — Nylon pressing screw threads into body sleeve and compresses pinch ring and seal to grip cable and prevent pull out

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

PART NO.	DESCRIPTION	CABLE O.D. RANGE
30810	3 Pole Male Straight	3 – 5mm / .118" - .197"
30811	3 Pole Female Straight	3 – 5mm / .118" - .197"
30812	4 Pole Male Straight	3 – 5mm / .118" - .197"
30813	4 Pole Female Straight	3 – 5mm / .118" - .197"