




Mini DIN Standard – 11 mm

- RoHS Compliant
- IP67 Rated
- NEMA 6 Rated
- Operating Temperature Range -25°C to 80°C

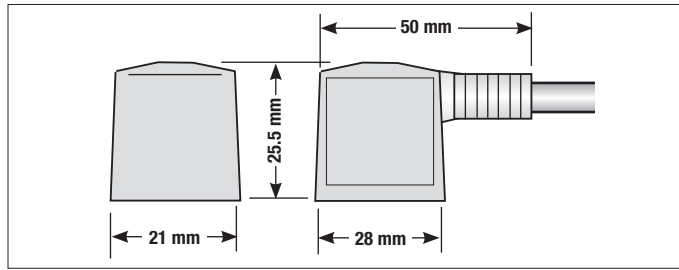

COLOR CODE	
DC 24 V	AC 115V
1 Black	1 Black
2 Black/White	2 Black/White
3 Green/Yellow	3 Green/Yellow

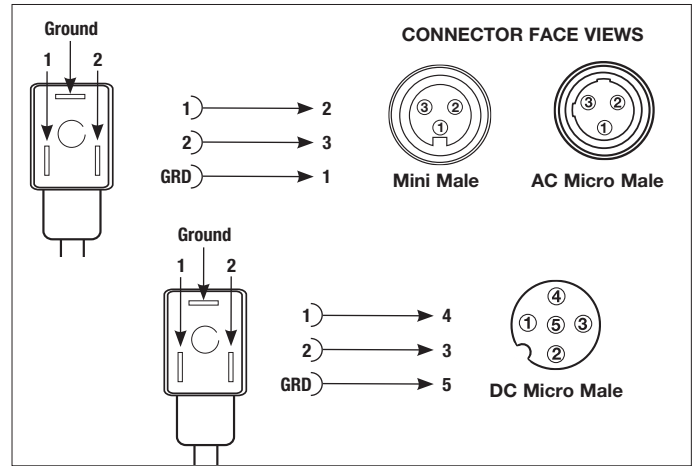

SPECIFICATIONS & KEY CHARACTERISTICS

- Connection Voltage: 6 – 24V AC/DC or 120V AC@ 50/60 Hz
- Nominal Current: 10 Amps
- Connection Test Voltage: 250V AC Max, 300 V DC Max
- Connector Material: Durable Polyurethane
- Center Screw: M3 x 28mm
- Suppressor Clamping Voltage: 24V AC/DC – 30V AC Continuous – 38V DC
120V AC – 130V AC Continuous – 170V DC
- White Translucent Body with LED Power Status Indicator
- No Sealing Gasket Required

FEATURES & BENEFITS

- 1. SECURITY YELLOW TREX-ONICS® 18 AWG 3 CONDUCTOR CABLE WITH HEAVY-DUTY POLYURETHANE JACKET** – A superior first line defense against tearing abrasion, impact, oil, ozone and most chemicals.
- 2. RUGGED POLYURETHANE SHELL DESIGN** – Resists damage from impact, abrasion, oil and most chemicals.
- 3. ZYTEL INSERT** – Durable fiberglass filled nylon insert.
- 4. MOLDED ASSEMBLY** – DIN Plug is secured to the cord to seal the unit, preventing dust and moisture from damaging the internal wiring.
- 5. VARISTOR SURGE SUPPRESSION** – Built into each Plug to protect against electrical spikes or surges.
- 6. SUPER BRIGHT LED STATUS LIGHT** – Incorporated into translucent DIN body, protecting LED from damage. Easily visible from multiple angles.
- 7. SELF SEALING UNIT** – Polyurethane shell seals without the need for a gasket, providing protection up to IP67.
- 8. IP67/NEMA 6** – Once properly installed the connection is protected from dust, moisture and oil.
- 9. ALL POLYURETHANE MICRO OR MINI-HEAD DESIGN** – Ensures 100% bonding between jacket and head.
- 10. DIN CONNECTORS IN INDUSTRY STANDARD CONFIGURATIONS** – Available with TPC Trex-Onics® Mini or Micro Quick-Connects™

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

BLUNT CUT PART NO.	AC MICRO PART NO.	DC MICRO PART NO.	MINI PART NO.	DESCRIPTION	CORD LENGTH	
					FEET	METERS
D02135XXAM002	D02135GCAM002	—	D02135LCAM002	120V DIN Conn w/LED & Suppression	6.56	2
D02135XXAM003	D02135GCAM003	—	D02135LCAM003	120V DIN Conn w/LED & Suppression	9.84	3
D02135XXAM004	D02135GCAM004	—	D02135LCAM004	120V DIN Conn w/LED & Suppression	13.12	4
D02135XXAM005	D02135GCAM005	—	D02135LCAM005	120V DIN Conn w/LED & Suppression	16.4	5
D02135XXAM006	D02135GCAM006	—	D02135LCAM006	120V DIN Conn w/LED & Suppression	19.68	6
D02235XXAM002	D02235GCAM002	D02235FCAM002	D02235LCAM002	24V DIN Conn w/LED & Suppression	6.56	2
D02235XXAM003	D02235GCAM003	D02235FCAM003	D02235LCAM003	24V DIN Conn w/LED & Suppression	9.84	3
D02235XXAM004	D02235GCAM004	D02235FCAM004	D02235LCAM004	24V DIN Conn w/LED & Suppression	13.12	4
D02235XXAM005	D02235GCAM005	D02235FCAM005	D02235LCAM005	24V DIN Conn w/LED & Suppression	16.4	5
D02235XXAM006	D02235GCAM006	D02235FCAM006	D02235LCAM006	24V DIN Conn w/LED & Suppression	19.68	6